
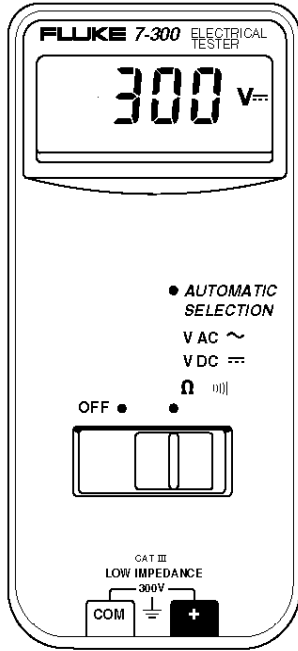


7 Series Electrical Testers

Economical, easy-to-use testers; ideal for basic electrical testing

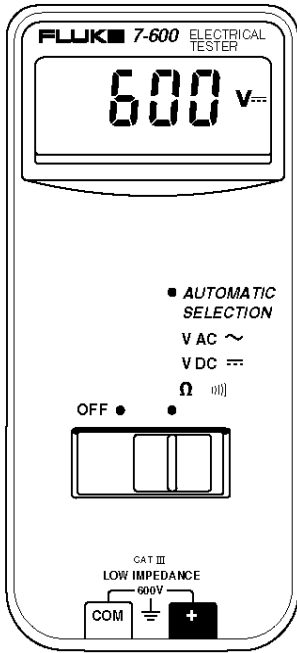

The economical 7 Series offers first-level electrical troubleshooting. The compact design and slide switch offer one-handed operation.

- 4000 count digital display
- Auto Selection simplifies voltage measurements in power environments. When measuring ohms/continuity with more than 4.5 volts present across the input jacks (intentional or not) the meter automatically switches to measuring ac or dc volts, whichever is greater. Input impedance is approximately 2 kΩ, helping determine if voltage is from leakage (so-called "ghost" voltages) or a hard connection. Overload protection is provided in all measurement modes.
- Automatic readings of volts ac (300V in 7-300) (600V in 7-600)
- Automatic readings of volts dc (300V in 7-300) (600V in 7-600)
- 400 Ohm Range/Continuity beeper
- TL75 Test Leads included with meter
- High visibility yellow plastic housing makes it easy to locate on the job or in your toolbox
- Simply turn on and use
- Sleep mode

Battery life: Alkaline, 650 hours continuous

Size: 142.3 mm L x 70.5 mm W x 34.6 mm D (5.55 in L x 2.75 in W x 1.35 in D)

Weight: 10 oz (286 gm)

Two year warranty

Specifications

Function	Range and Resolution	Best Accuracy
VDC	40.00V, 400.0V*, 600V*	±(1.5% + 1)
VAC	40.00V, 400.0V*, 600V*	±(2.9% + 3)
Resistance	400.0Ω	±(1.5% + 2)

*Maximum reading of 300 volts on 7-300

Accessories and Ordering Information

Included Accessories

The Fluke 7 Series comes equipped with TL75 Hard Point™ Test Leads, a 9 volt battery (installed) and owner's manual.

Ordering Information

Fluke 7-300 and Fluke 7-600 Electrical Testers

Need Technical Assistance? Call:

1-800-44-FLUKE

Toll-free in the U.S.

(905) 890-7600 in Canada

(206) 356-5500 other countries

5. If none of the items apply, here is another workaround:

- Close TrueSync Information Manager.
- Open a text editor such as Notepad or WordPad.
- Open the *INIT.SKW file, where * is equal to your calendar name or initials (which is stored in the Starfish\REX TrueSync\Userdata folder by default).
- Under the **[CalTodo]** section, you'll see a line that reads **LastEditTime=<date>**. Change the date to the last day your To Do items appear in TrueSync Information Manager.
- Save this file, exit your text editor, and then re-open TrueSync Information Manager. To Do items should now roll forward.

Contacts

Q: Why can't I drag vCards into a TrueSync Information Manager cardfile?

A: TrueSync Information Manager supports vCalendar and vCard version 1.0 format only. If your vCalendar or vCards were created using version 2.0, TrueSync Information Manager will not accept them.

Q: Occasionally the alphabetical index disappears in Contacts view. What may be causing this?

A: Another user who had a similar problem found that the letters appeared when his notebook was undocked, and disappeared when docked. He confirmed that the problem was in Windows 95's hardware profiles. His solution was the following:

1. Identify the defective hardware profile (i.e., the one operative when your laptop is docked and the alphabetical index does not appear). To do this, choose **Settings Control Panel** from Windows **Start** menu. Open the **System** icon, and then select the **Hardware Profiles** tab.
2. Reboot your system and select a different configuration (e.g., undocked). Choose **Settings | Control Panel** from Windows **Start** menu. Open the **System** icon, and then select the **Hardware Profiles** tab. Delete the offending profile (e.g., docked).
3. Reboot again using the docked configuration and Windows 95 will rebuild a new hardware profile for that configuration. You may need to specify your **Display** properties and **Printers** in the Control Panel as well.

Starfish and TrueSync are registered trademarks of Starfish Software. REX is a trademark of Franklin Electronic Publishers, Inc.

DISCLAIMER: You have the right to use this technical information subject to the terms of the License Statement, Limited Warranty, and Limitation of Liability that you received with the product to which this information pertains.